



ECQ PENTAGON MUG RUG INSTRUCTIONS

NOTE: These mug rugs are decorative and may not protect against spills or excessive heat

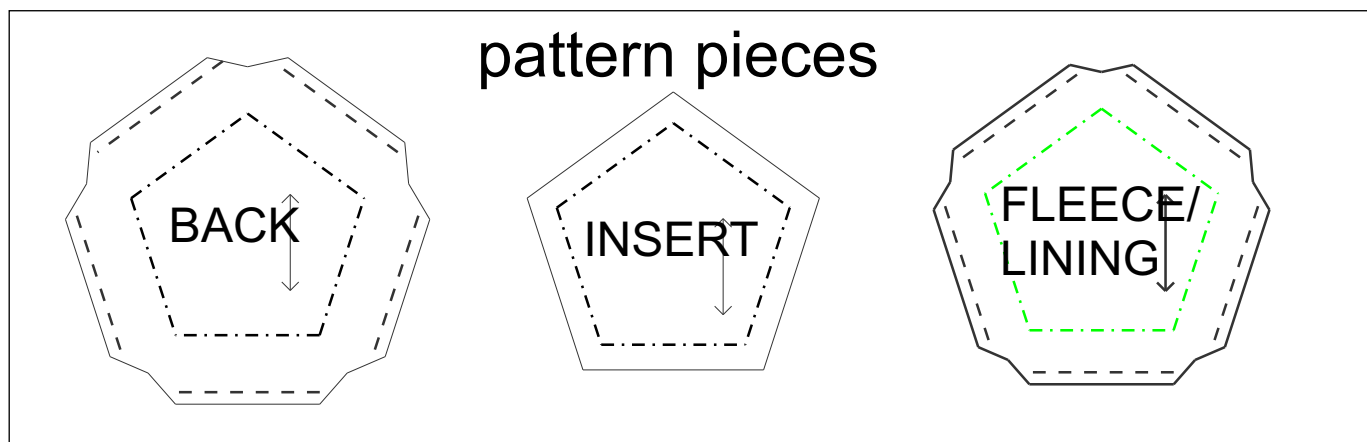


FLEECE/LINING material should be a stable quilt fleece. Pellon Thermolam is recommended

A new, simpler method for turning the lined mug rug was developed.

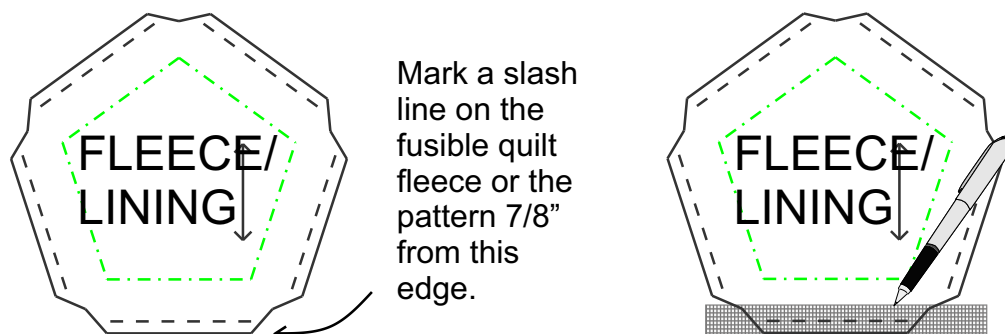


- The line should be placed to the outside of the center hexagon.
- The slash line should be shorter than the edge of the center hexagon.
- Take a little ($3/8$ " to $1/2$ ") from each end of the line so it is not near the edges of the fleece.
-


FLEECE/LINING material should be a stable quilt fleece. Pellon Thermolam is recommended

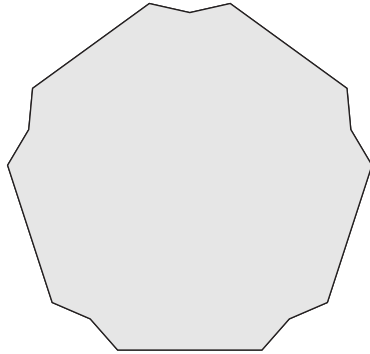


RIGHT SIDE OF
BACK

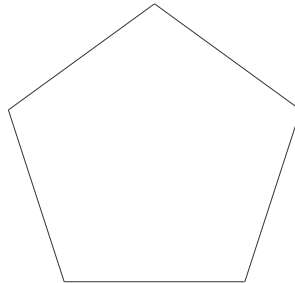

RIGHT SIDE OF
INSERT

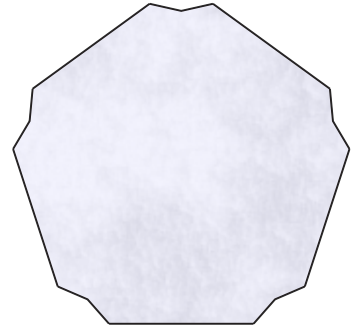


RIGHT SIDE OF
FLEECE/LINING

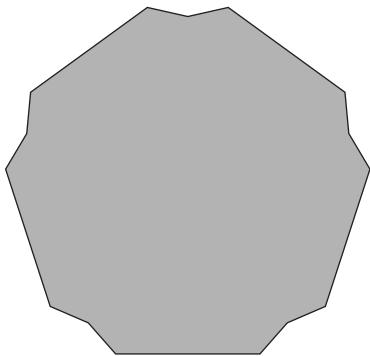


WRONG SIDE OF
BACK

The fusible side of
quilt fleece is the
wrong side.

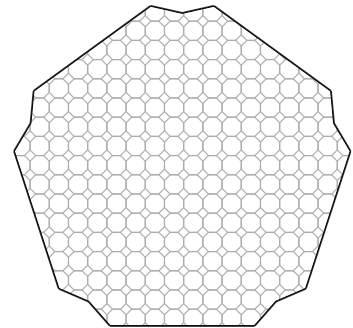


WRONG SIDE OF
FLEECE/LINING

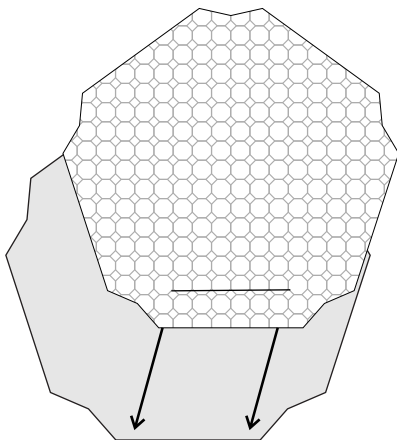

Put lining & back right sides together, at the
edge with the slash line. match the raw
edges. Sew a seam 1/4" from the edge. Use a
small stitch length so back tacking is not
necessary.


Seam allowances are 1/4"

The back is meant to be bigger than the lining


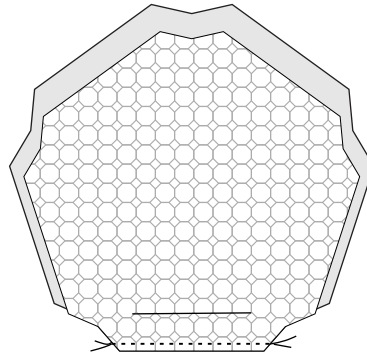


After this seam is sewn, move the lining away from the back and cut along the slash line (Not pictured.)

Match the remaining raw edges and sew along the stitching lines. Leave the corners open.




It the mug rug is flipped over the back will be wrinkled

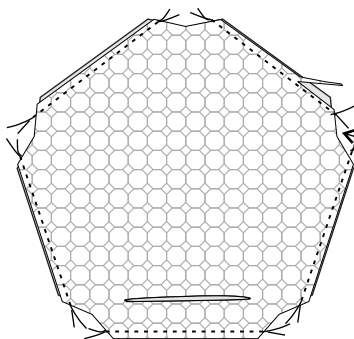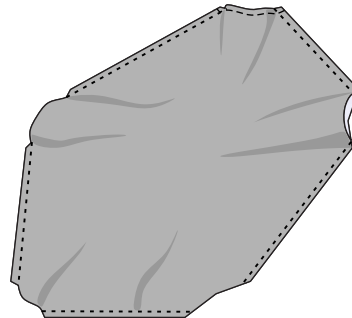

5) Trim the fusible fleece above the stitching lines to 1/2 of its original width or (about 1/8" wide.)

Use the cut opening in the lining to pull the back right side out (Not


This will position the fusing agent of any fusible fleece on the inside and next to the wrong side of the back fabric. Smooth the piece so the borders surrounding the fleece/lining appear as uniform as possible and press to activate the fusing agent.

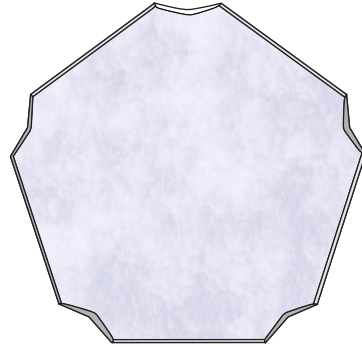


7) It is not necessary to pad-stitch the pieces but if it is to be done for embellishment, now is the time to do it.

To pad-stitch: position the insert in the center of the lined back and embroider or free-motion embroider keeping the design 1.5 " from the finished edge of the back.


NOTE: Using clear plastic polyester thread in the machine needle, when embroidering, will not interfere with any decoration. It is attractive to use an embroidery thread in the bobbin. If embroidery thread is used for the bobbin, use a regular bobbin case (not the one for embroidery.)

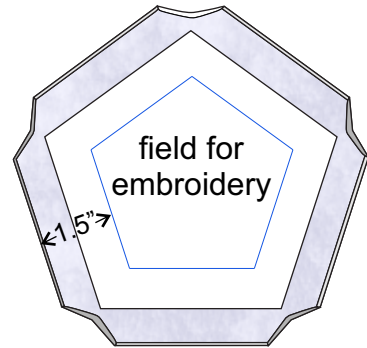

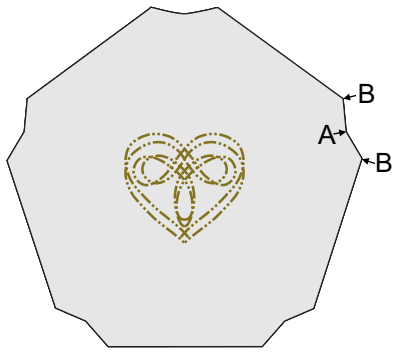


8) Flip the mug rug so the back side is up.

Fold the un-sewn edges at point A so the fabric is right sides together and point B on one side of the angle meets point B on the other side of the angle. Sew 1/4" from the edges through all layers. Back-stitch or secure threads at both ends.

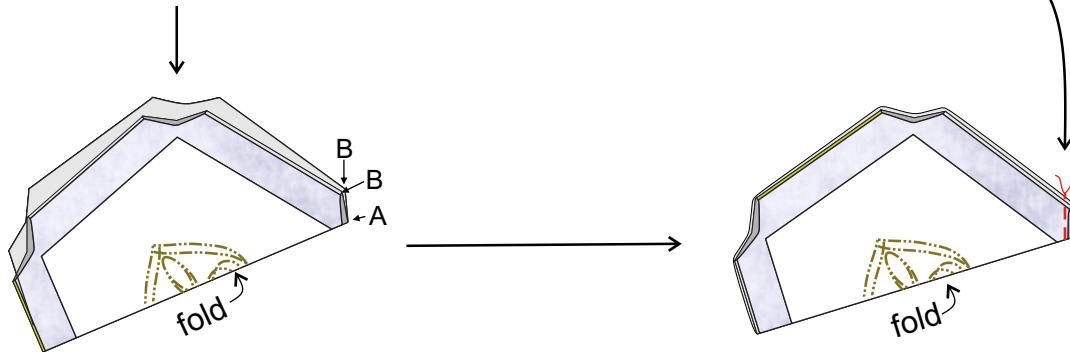


9) Repeat step # 8 for the remaining un-sewn angles, forming sashes. Flip the sashes out (9A) and, if the insert was not pad-stitched in place, slide the insert's edges under the sashes (9B.)


10) Stitch the sashes in place through all layers. A large stitch length like 3.5 to 4 is recommended.

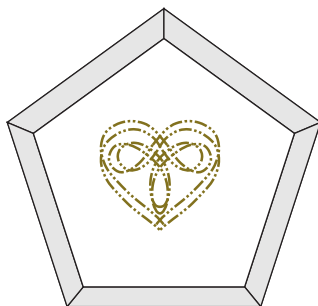

9A

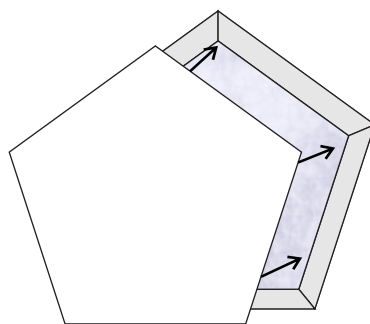

9B

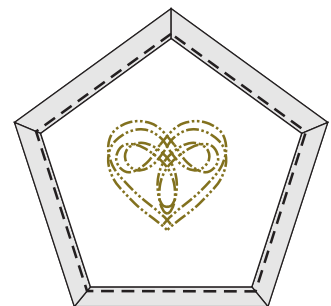

10